


CONTROL JOINT

NOTES:

1. FOR FLATWORK, PLACE AT SPACING EQUAL TO SLAB WIDTH, BUT NOT GREATER THAN 12'.
2. FOR CURB & GUTTER AND CROSS GUTTER PLACE AT 10' INTERVALS.

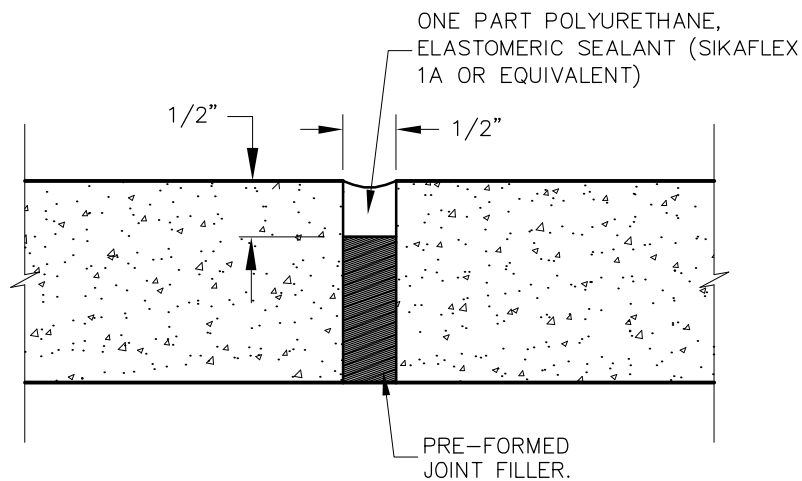

EXPANSION JOINT

NOTES:

1. FOR FLATWORK, PLACE AT 50' INTERVALS.
2. FOR CURB & GUTTER, PLACE AT 50' INTERVALS, EXCEPT WHEN USING SLIP FORM MACHINE, PLACE AT BEGINNING & END OF EACH CONTINUOUS RUN.

STANDARD TYPICAL CONCRETE JOINTS

NOTE: USE FOR CURB & GUTTER, CROSS GUTTER, AND SIDEWALK.

REVISION	DATE

S-171



Jones & DeMille Engineering

1535 South 100 West — Richfield, Utah 84701
 (435) 896-8266 Phone
 (435) 896-8268 Fax
 www.jonesanddemille.com

RICHFIELD CITY		
ROADWAY & MISCELLANEOUS		
SCALE: NONE	ENG.: T.M.J.	PROJ.#: 0501-144
DATE: 01/24/2005	DWG.BY: L.G.	DWG.NAME: Road